



Note:

Glass comes with GK70-P01 gaskets pre-installed. Nylon gaskets & ferrule that come with AB702T bolts are to be discarded.

See DN70-IM for donut-to-IGU installation instruction.

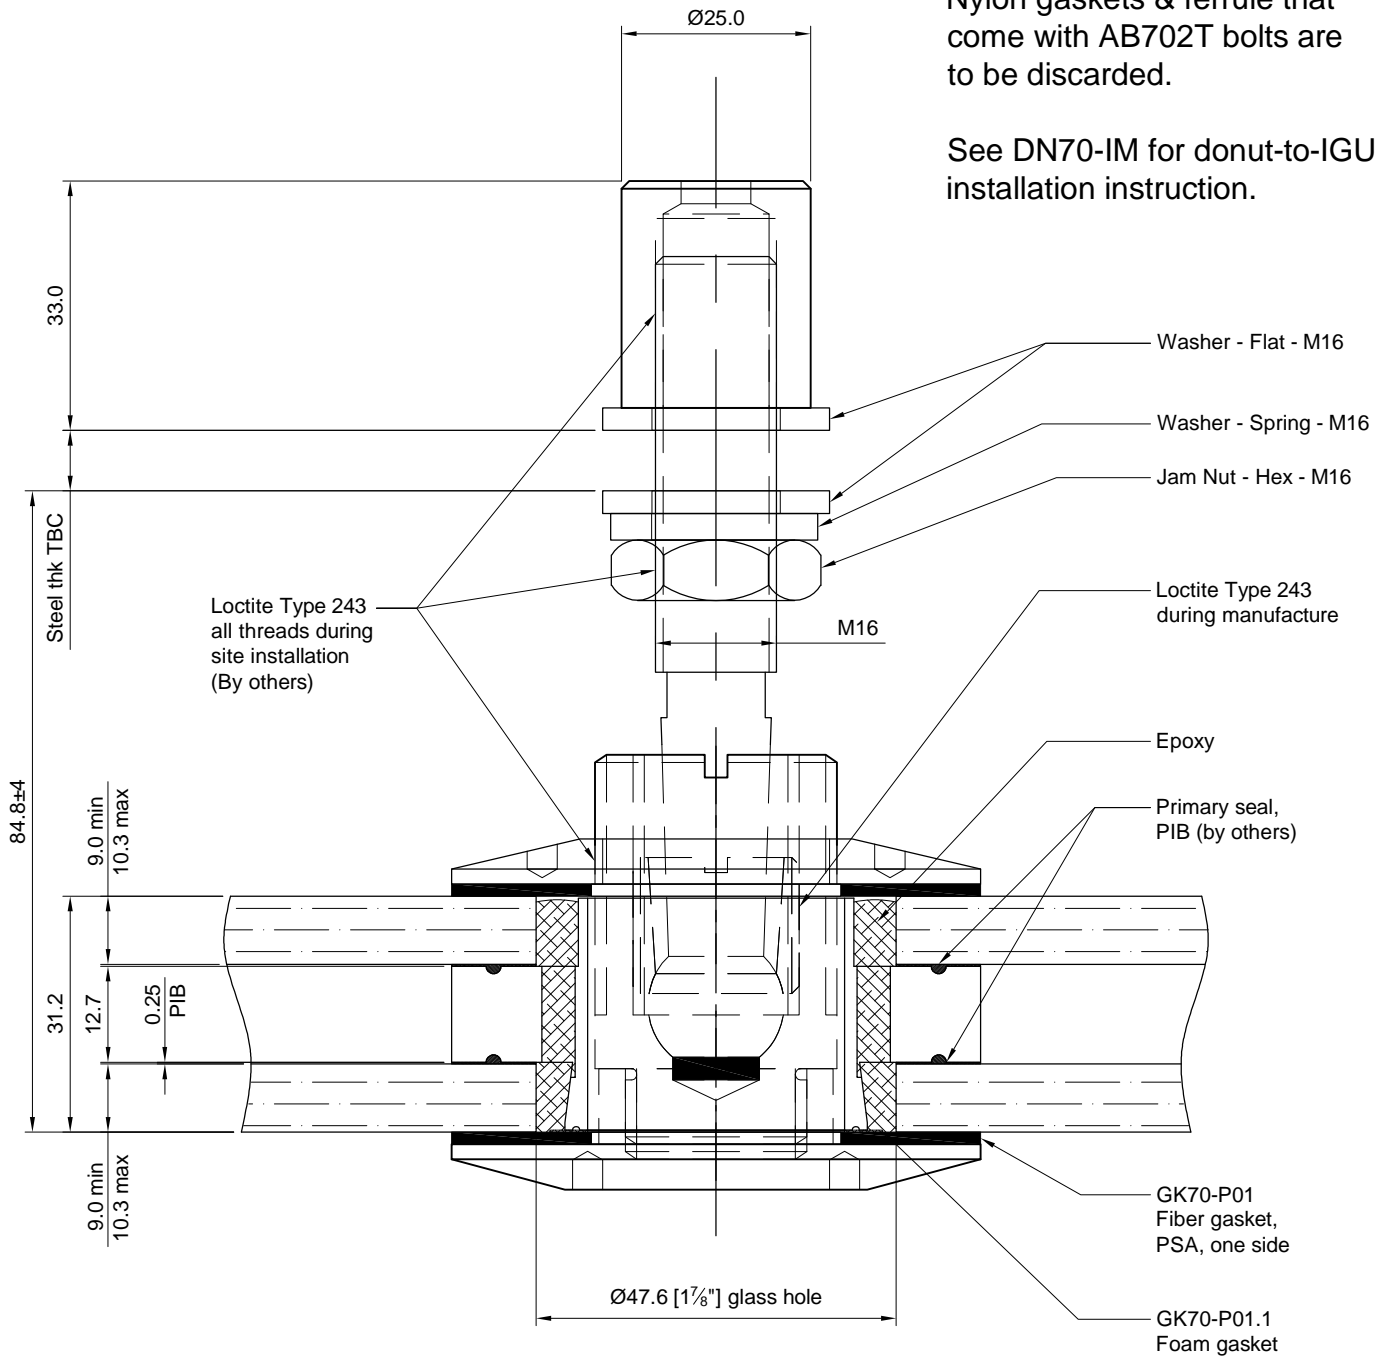

REV 3 - Loctite type 243 notes added - 20160422
 REV 2 - Spring washer relocated - FEB 3-2015
 REV 1 - M16 jam hex nut & washers notes added - DEC 16-2014

Quantity: Sets Material: Grade 316 Stainless steel Finish: Machined	Hole in glass - See ref. dwg. DN70-IM Dimensions millimeter unless otherwise shown 4mm hole can be tighten w/ adjustable pin spanner (Ref. SPA-01) Subject to change	Drawn: JH Drawn date: OCT 4-2013	 <p>stella</p> [t] (604) 231 5892 [f] (604) 231 5893 [e] info@stellaglasshardware.com
ASSEMBLY DRAWING ARTICULATING BOLT AB702T W/ ALUMINUM DONUT FOR INSULATED GLASS UNITS (10 / 12.7 / 10)		Checked: _____ Checked date: _____	
		Scale: 1:1 Rev: 3	
DWG No: AB702T-DN		_____	