


**This Hand Rail Fitting meets the requirements of the National Building Code of Canada 2005, Div B, Section 3.4.6.4.**

Allowable loads are for distance between fittings of up to 1.5 m.

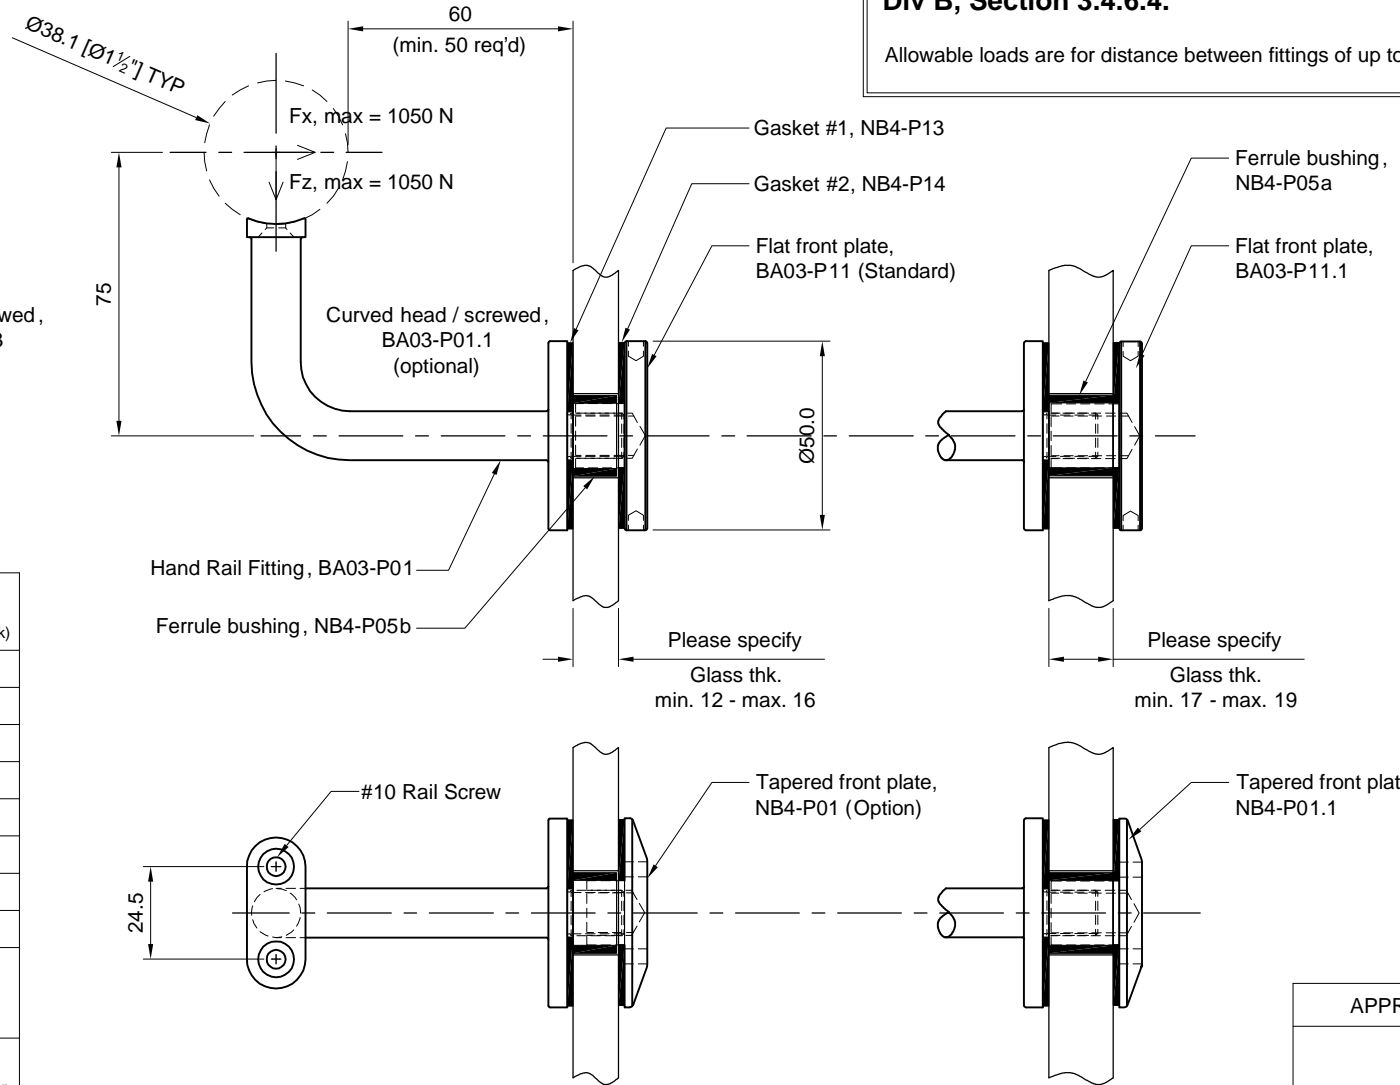

**ORDERING INFORMATION**

(please check)

Curved head/screwed (std)	
Flat head/screwed (option)	
Weld head (option)	
Flat front plate (std)	
Tapered front plate (option)	

Glass thickness \_\_\_\_\_ mm

If sscrew to be included, pls specify:  
(2) Rail screws  
#10 \_\_\_\_\_

CUSTOMER APPROVAL

(PLEASE SIGN)

DATE:


REV 1 - New details - NOV 3-2011

APPROVAL

DATE

Quantity: Sets  
Material: Fitting: 2205 Duplex, Front Plate: 304/316 SS  
Finish: Bracket: Satin #4; Front plate: Machined

Hole in monolithic glass min. Ø22.2mm [Ø7/8"]; laminate glass min. Ø25.4mm [Ø1"]  
Dimensions millimeter unless otherwise shown  
Apply loctite 243 to all threads during assembly  
(To increase curing speed, please apply activator 7649)  
Details are typical and are subject to change to meet project requirement



Drawn	Drawn date
JH	FEB 8-2010
Approved	Approved date
JS	FEB 8-2010
Scale	Rev.
1:2	1
DWG No	
BA503-G	

**stella**  
[t] (604) 231 5892  
[f] (604) 231 5893  
[e] info@stellaglasshardware.com

**ASSEMBLY DRAWING  
HAND RAIL FITTING - BA03 GLASS MOUNTED  
FORMALLY BA03-A01**