


**M12 Bolt load**

11,5kN Tension only

6,6kN Shear only


(allows 50% preload & 1.5 Safety factor)

No values provided for pull out

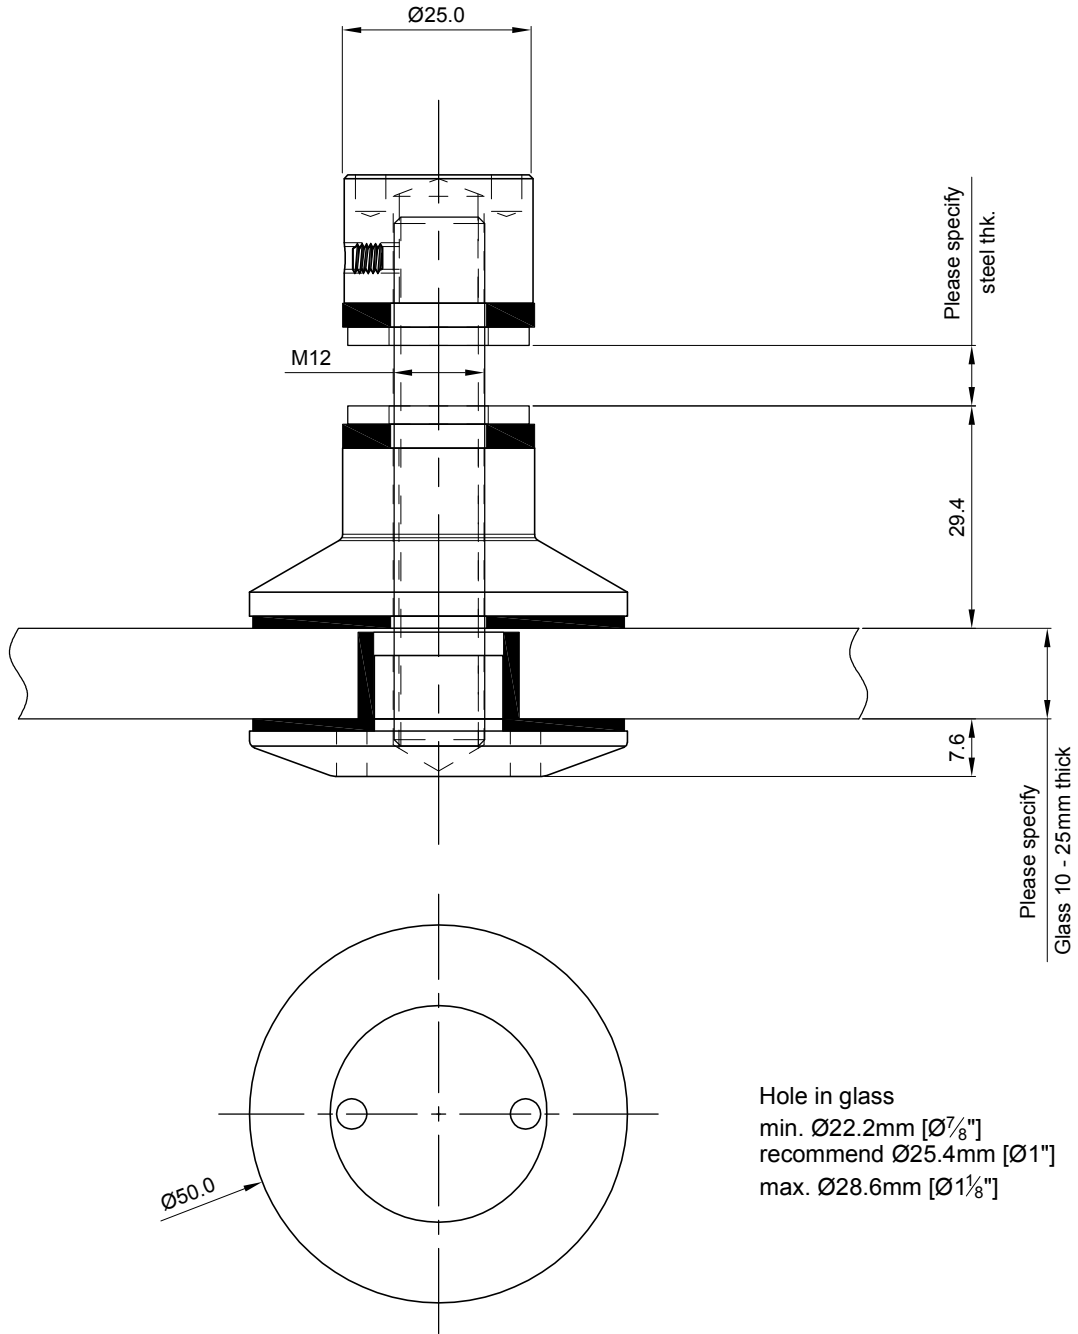


Hole in glass  
 min. Ø22.2mm [Ø7/8"]  
 recommend Ø25.4mm [Ø1"]  
 max. Ø28.6mm [Ø1 1/8"]

Quantity: Sets  
 Material: Grade 304/316 Stainless steel  
 Finish: Machined

Hole in glass min. Ø22.2mm [Ø7/8"]  
 Dimensions millimeter unless otherwise shown  
 Loctite all threads during final assembly  
 4mm hole can be tighten w/ adjustable pin spanner  
 (Ref. SPA-01)   
 Subject to change

Drawn	Drawn date
RL	DEC 12-04
Checked	Checked date
Scale	Rev.
1:1	-
DWG No	
NB505T	



**stella**

[t] (604) 231 5892  
 [f] (604) 231 5893  
 [e] info@stellaglasshardware.com

**ASSEMBLY DRAWING**  
**NON-ARTICULATING BOLT NB4 (P12)**  
**FORMERLY NB4 (P12)**