
Load per leg 1,7kN @ yield

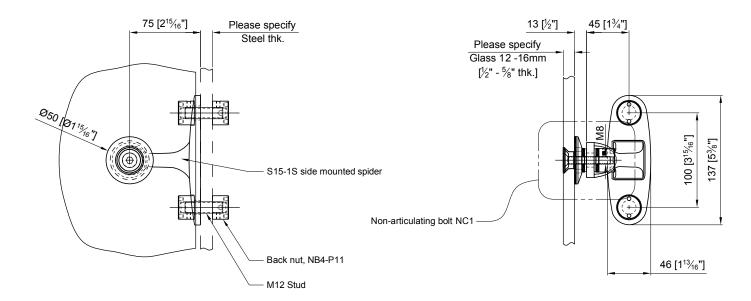

FRONT VIEW SIDE VIEW

APPROVAL

DATE

Quantity: Sets

Material: Grade 304/316 Stainless steel Finish:

Spider: Satin; Glass bolt: Machined

Hole in glass Ø19.1 [$\frac{3}{4}$ "] & Csk to suit ferrule bushing NC1-P04 Dimensions millimeter unless otherwise shown

Apply loctite 243 to all threads during assembly (To increase curing speed, please apply activator 7649)

Details are typical and are subject to change to meet project requirement

JH JAN 6-2010 Approved date JAN 6-2010 RL Third Angle Projection 1:4

DWG No

SS151ST-NB501C

[t] (604) 231 5892 [f] (604) 231 5893 [e] sales@stellassemblies.com

ASSEMBLY DRAWING S15-1Sa SIDE MOUNTED SPIDER W/ NON-ARTICULATING BOLT NC1 FORMALLY S15-1Sa-NC1