

Load per leg 0,8kN @ yield Load per leg 1,5kN @ yield

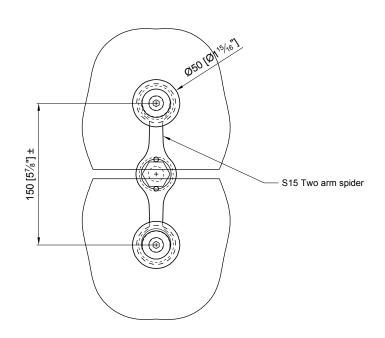

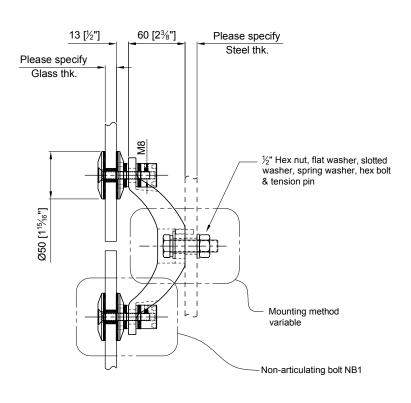

FRONT VIEW

SIDE VIEW

APPROVAL

DATE

Quantity: Sets

Material: Grade 304/316 Stainless steel

Finish: Spider: Satin; Glass bolt: Machined

Hole in glass min. Ø15.9mm [Ø %"] Dimensions millimeter unless otherwise shown

Apply loctite 243 to all threads during assembly

(To increase curing speed, please apply activator 7649) Details are typical and are subject to change to meet project requirement

Drawn date JH NOV 18-09 Approved date RL Third Angle Projection

NOV 18-09 1:4 DWG No SS152FT-NB501T



custom glass hardware inc [t] (604) 231 5892 [f] (604) 231 5893 [e] sales@stellassemblies.com

ASSEMBLY DRAWING S15-2a SPIDER W/ NON-ARTICULATING BOLT NB1 FORMALLY S15-2a-NB1