

Load per leg
0,8kN @ yield

Load per leg 1,5kN @ yield

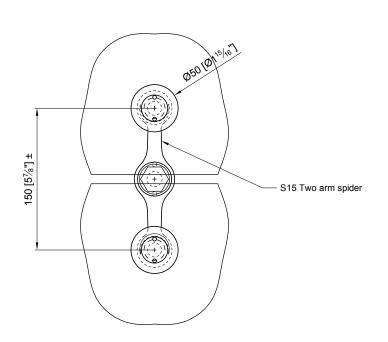

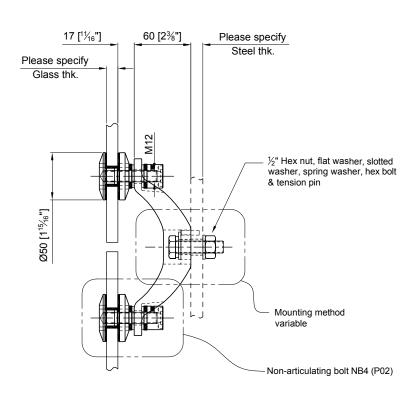

FRONT VIEW

SIDE VIEW

APPROVAL

DATE

Quantity: Sets

Material: Grade 304/316 Stainless steel
Finish: Spider: Satin; Glass bolt: Machined

Hole in glass min. Ø22.2mm [Ø $\frac{7}{8}$] Dimensions millimeter unless otherwise shown Apply loctite 243 to all threads during assembly

(To increase curing speed, please apply activator 7649)
Details are typical and are subject to change to meet project requirement



ASSEMBLY DRAWING S15-2a SPIDER W/ NON-ARTICULATING BOLT NB4(P02) FORMALLY S15-2a-NB4(P02)