
Load per leg 0,8kN @ yield 75 [2¹⁵/₁₆"] Ø50 [Øh15/16"] 150 [5%"] S15 Two arm "V" shaped spider Load per leg 1,5kN @ yield

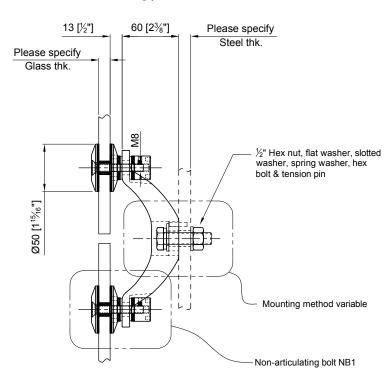

FRONT VIEW

SIDE VIEW

APPROVAL

DATE

Quantity: Sets

Finish:

Material: Grade 304/316 Stainless steel

Spider: Satin; Glass bolt: Machined

Hole in glass min. Ø15.9mm [Ø \[\frac{9}{8} \]"]
Dimensions millimeter unless otherwise shown

Apply loctite 243 to all threads during assembly

(To increase curing speed, please apply activator 7649)
Details are typical and are subject to change to meet project requirement

Third Angle Projection



ASSEMBLY DRAWING
S15-2Va "V" SHAPED SPIDER W/ NON-ARTICULATING BOLT NB1
FORMALLY S15-2Va-NB1