
Load per leg 1,7kN @ yield

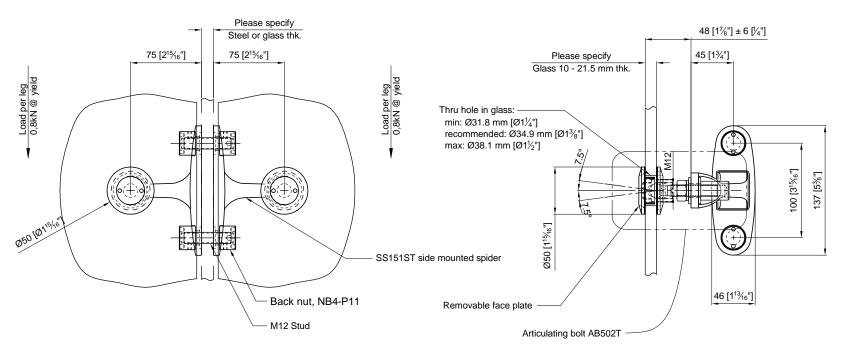

FRONT VIEW SIDE VIEW

APPROVAL

DATE

Quantity: Sets

Material: Grade 316 Stainless steel

Finish: Spider: Satin; Glass bolt: Machined

Hole in glass see above

Dimensions millimeter unless otherwise shown Apply loctite 243 to all threads during assembly

(To increase curing speed, please apply activator 7649)

Details are typical and are subject to change to meet project requirement

SS152ST-AB502T



ASSEMBLY DRAWING
SS151ST SIDE MOUNTED SPIDER W/ FACE MOUNTED ARTICULATING BOLT AB502T