
Load per leg 1,7kN @ yield

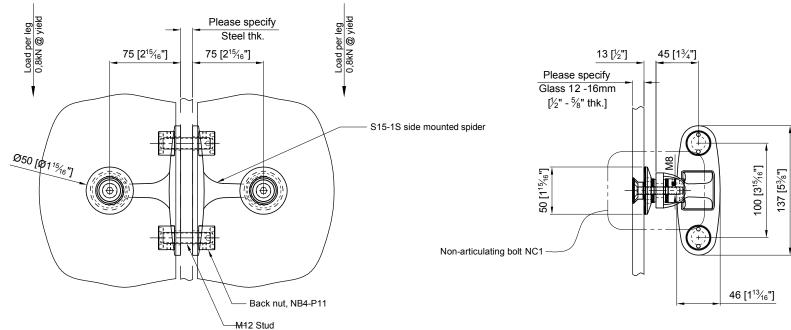

FRONT VIEW SIDE VIEW

**APPROVAL** 

DATE

Quantity: Sets

Material: Grade 304/316 Stainless steel Finish: Spider: Satin; Glass bolt: Machined Hole in glass Ø19.1 [¾"] & Csk to suit ferrule bushing NC1-P04 Dimensions millimeter unless otherwise shown

Apply loctite 243 to all threads during assembly

(To increase curing speed, please apply activator 7649) Details are typical and are subject to change to meet project requirement

Drawn date JH JAN 6-2010 Approved date RL JAN 6-2010 Third Angle Projection 1:4

DWG No

SS152ST-NB501C



**ASSEMBLY DRAWING** S15-2Sa SIDE MOUNTED SPIDER W/ NON-ARTICULATING BOLT NC1 FORMALLY S15-2Sa-NC1