


FRONT VIEW

S15-4a Four arm spider

Hole in glass
min. Ø22.2mm [Ø7/8"]
recommend Ø25.4mm [Ø1"]
max. Ø28.6mm [Ø1 1/8"]

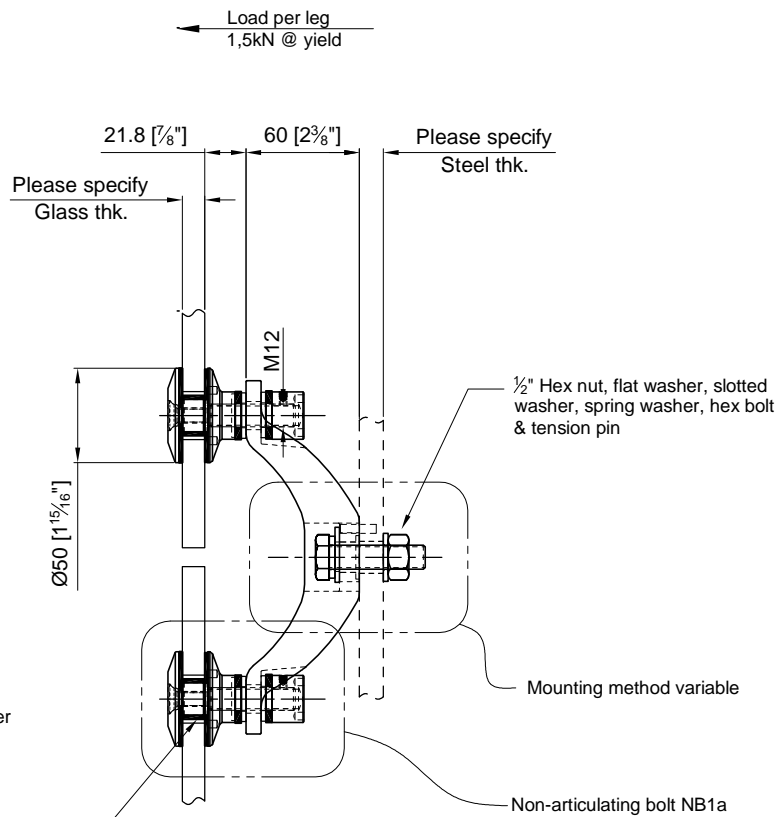


SIDE VIEW

APPROVAL
DATE

Quantity: Sets
Material: Grade 304/316 Stainless steel
Finish: Spider: Satin; Glass bolt: Machined

Hole in glass min. Ø22.2mm [Ø7/8"]
Dimensions millimeter unless otherwise shown
Apply loctite 243 to all threads during assembly
(To increase curing speed, please apply activator 7649)
Details are typical and are subject to change to meet project requirement



Drawn	Drawn date
JH	NOV 18-09
Approved	Approved date
RL	NOV 18-09
Scale	Rev.
1:4	-
DWG No	
SS154FT-NB502T	

stella
[t] (604) 231 5892
[f] (604) 231 5893
[e] info@stellaglasshardware.com

ASSEMBLY DRAWING
S15-4a SPIDER W/ NON-ARTICULATING BOLT NB1a
FORMERLY S15-4a-NB1a