
Load per leg 1,7kN @ yield

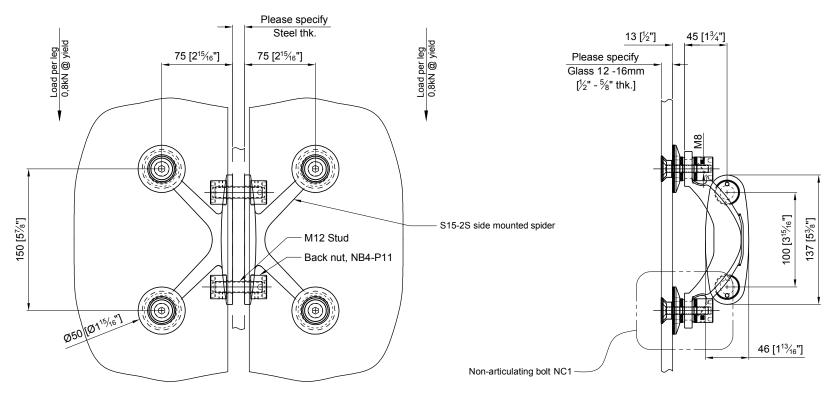

FRONT VIEW SIDE VIEW

**APPROVAL** 

DATE

Quantity: Sets

Material: Grade 304/316 Stainless steel

Finish: Spider: Satin; Glass bolt: Machined Hole in glass Ø19.1 [¾"] & Csk to suit ferrule bushing NC1-P04 Dimensions millimeter unless otherwise shown

Apply loctite 243 to all threads during assembly

(To increase curing speed, please apply activator 7649) Details are typical and are subject to change to meet project requirement

JH JAN 6-2010 Approved date RL Third Angle Projection

JAN 6-2010 1:4 SS204SV-NB501C



**ASSEMBLY DRAWING** TWO S15-2VSa "V" SHAPED SIDE MOUNTED SPIDER W/ NON-ARTICULATING BOLT NC1 FORMALLY S15-4Sa-NC1