


**FRONT VIEW**

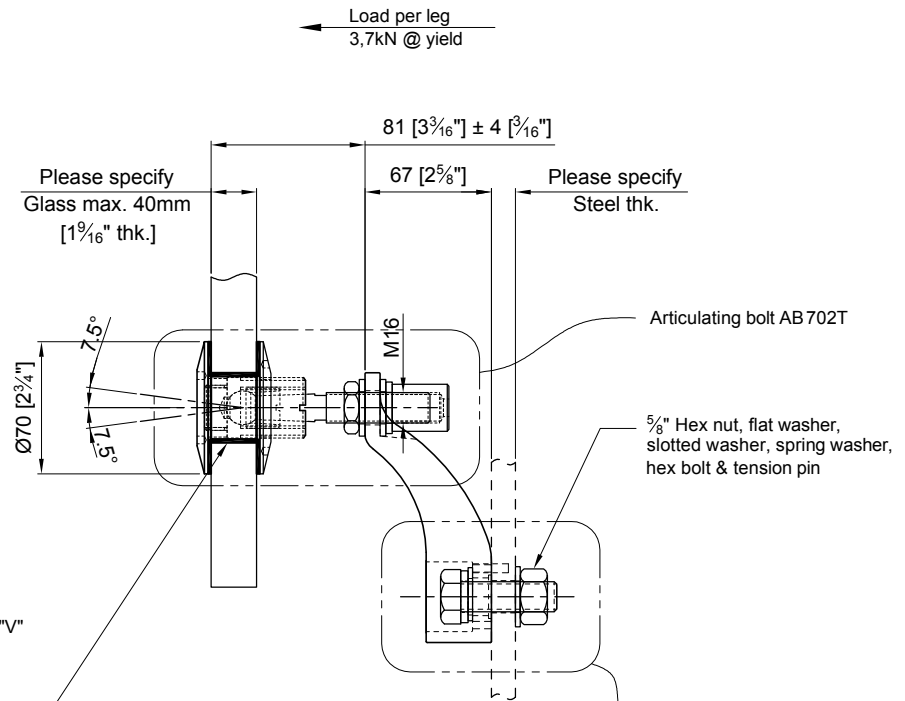

**SIDE VIEW**

SS201FV Single arm "V" shaped spider

Thru hole in glass:  
 min: Ø38.1mm [Ø1 1/2"]  
 recommended in laminate: Ø41.3mm [Ø1 5/8"]  
 max: Ø44.5mm [Ø1 3/4"]

Articulating bolt AB702T


5/8" Hex nut, flat washer, slotted washer, spring washer, hex bolt & tension pin

Mounting method variable

APPROVAL
DATE

Quantity: Sets  
 Material: Grade 304/316 Stainless steel  
 Finish: Spider: Satin; Glass bolt: Machined

Hole in glass see above  
 Dimensions millimeter unless otherwise shown  
 Apply loctite 243 to all threads during assembly  
 (To increase curing speed, please apply activator 7649)  
 Details are typical and are subject to change to meet project requirement



Drawn	Drawn date
JH	APR 26-2013
Approved	Approved date
-	-
Scale	Rev.
1:4	-
DWG No	
SS201FV-AB702T	

**stella**  
 [t] (604) 231 5892  
 [f] (604) 231 5893  
 [e] info@stellaglasshardware.com

**ASSEMBLY DRAWING**  
**SS201FV "V" SHAPED SPIDER W/ ARTICULATING BOLT AB702T**