

Load per leg 1,5kN @ yield Load per leg 3,7kN @ yield

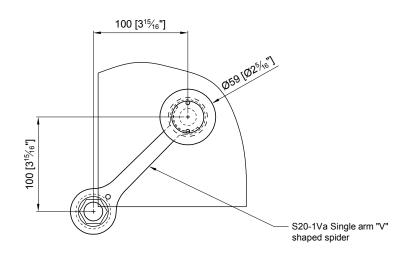

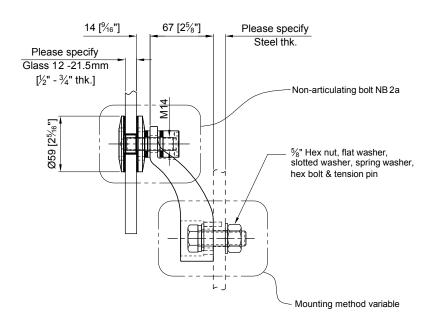

FRONT VIEW SIDE VIEW

**APPROVAL** 

DATE

Quantity: Sets

Material: Grade 304/316 Stainless steel Finish: Spider: Satin; Glass bolt: Machined

Hole in glass min. Ø22.2mm [Ø \(^7\)\[8] Dimensions millimeter unless otherwise shown Apply loctite 243 to all threads during assembly (To increase curing speed, please supply activator 7649)
Details are typical and are subject to change to meet project requirement

Drawn date JH NOV 18-09 Approved date RL NOV 18-09 Third Angle Projection

1:4

SS201FV-NB601T

DWG No

[t] (604) 231 5892 [f] (604) 231 5893 [e] sales@stellassemblies.com

**ASSEMBLY DRAWING** S20-1Va "V" SHAPED SPIDER W/ NON-ARTICULATING BOLT NB2a FORMALLY S20-1Va-NB2a