
Load per leg
3,7kN @ yield

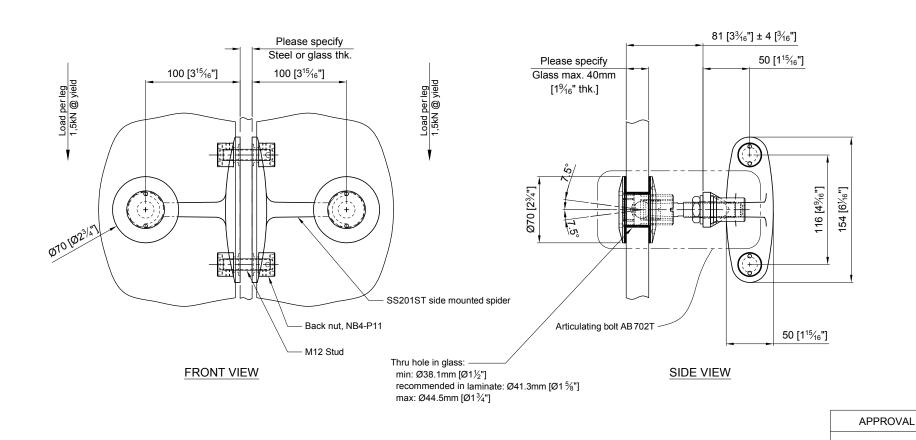

Quantity: Sets

Material: Grade 304/316 Stainless steel
Finish: Spider: Satin; Glass bolt: Machined

Hole in glass see above

Dimensions millimeter unless otherwise shown Apply loctite 243 to all threads during assembly (To increase curing speed, please apply activator 7649)

Details are typical and are subject to change to meet project requirement



[e] info@stellaglasshardware.com

DATE

ASSEMBLY DRAWING
TWO SS201ST SIDE MOUNTED SPIDER W/ ARTICULATING BOLT AB702T