


FRONT VIEW

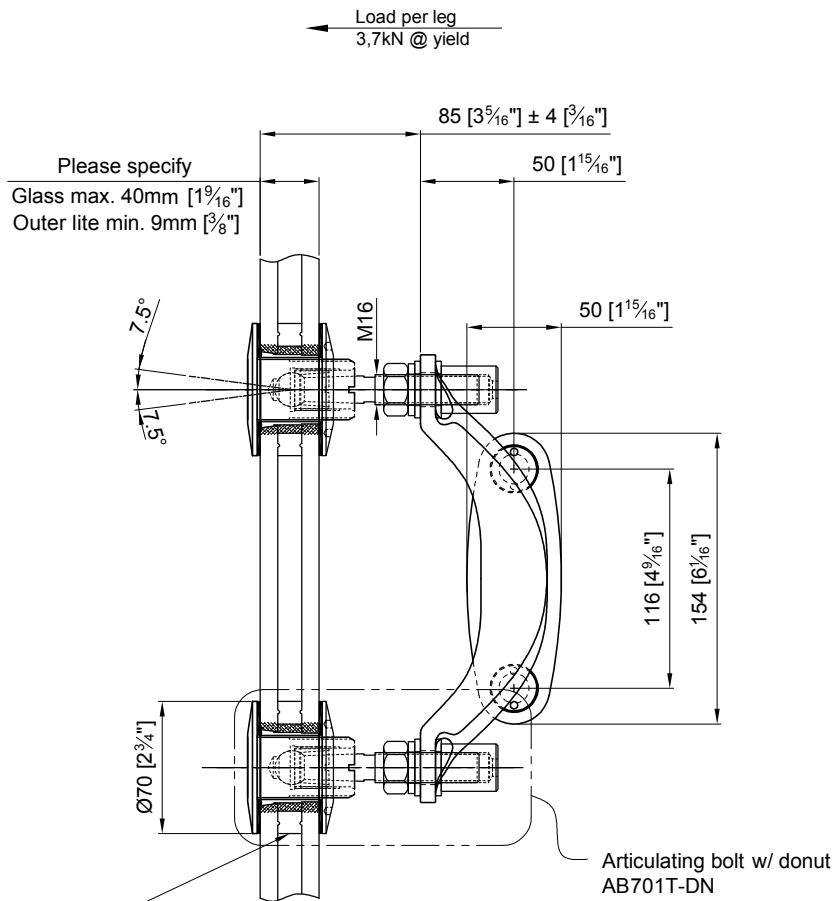

SIDE VIEW


Ø47.6 [Ø1 7/8\"/>

APPROVAL

DATE

Quantity: Sets  
 Material: Grade 304/316 Stainless steel  
 Finish: Spider: Satin; Glass bolt: Machined

Hole in glass see above  
 Dimensions millimeter unless otherwise shown  
 Apply loctite 243 to all threads during assembly  
 (To increase curing speed, please apply activator 7649)  
 Details are typical and are subject to change to meet project requirement




Drawn: JH  
 Drawn date: DEC 14-09

Approved: RL  
 Approved date: DEC 14-09

Scale: 1:4  
 Rev: -

DWG No: SS202SV-AB701T-DN



**stella**

[t] (604) 231 5892  
 [f] (604) 231 5893  
 [e] info@stellaglasshardware.com

ASSEMBLY DRAWING  
 SS202SV "V" SHAPED SIDE MOUNTED SPIDER W/ ARTICULATING BOLT W/ DONUT AB701T-DN  
 FOR INSULATED GLASS UNITS (10 / 12.7 / 10)