


Standard penetration length	
Glass thickness	Penetration
12mm	124mm
19mm	117mm
21.5mm (10/1.52/10)	114mm

For non-standard penetration,
contact Stella!


Hole in glass
min. $\varnothing 22.2\text{mm}$ [$\varnothing 7/8"$]
recommend $\varnothing 25.4\text{mm}$ [$\varnothing 1"$]
max. $\varnothing 28.6\text{mm}$ [$\varnothing 1 1/8"$]

NB4-P09.1,
M12 Hanger bolt
x 150mm [6"] lg.

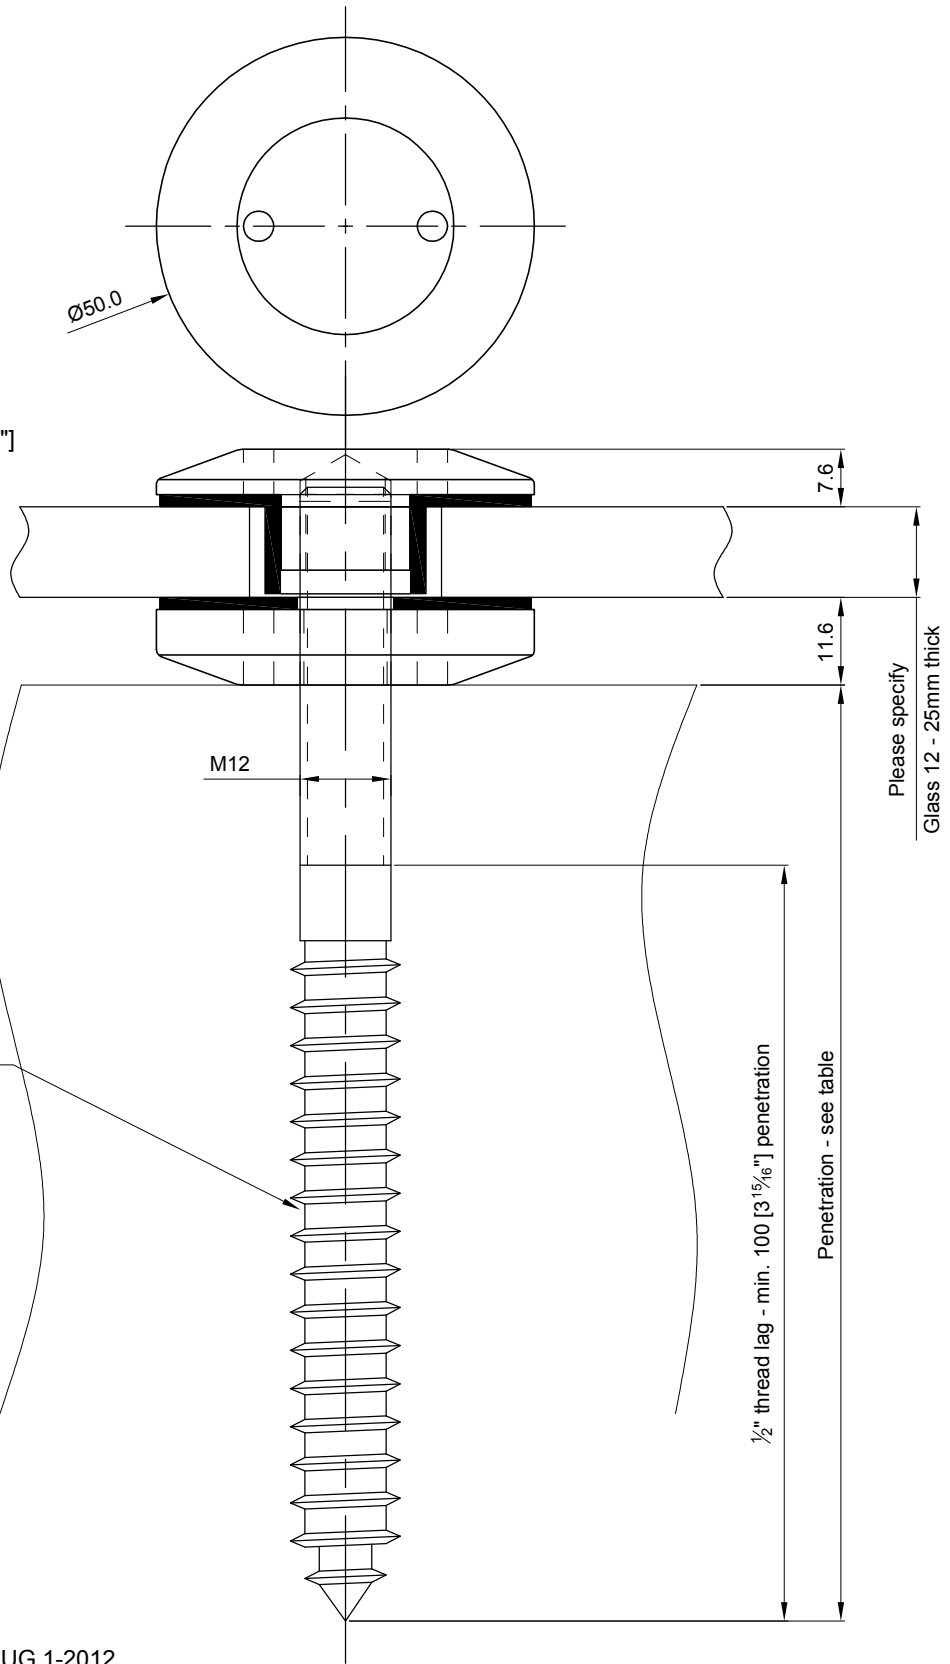


REV 1 - Lag bolt penetration clarified - AUG 1-2012

Quantity:
Material: Grade 304/316 Stainless steel
Finish: Machined

Hole in glass min. $\varnothing 22.2\text{mm}$ [$\varnothing 7/8"$]
Dimensions millimeter unless otherwise shown
Loctite all threads during final assembly
4mm hole can be tighten w/ adjustable pin spanner
(Ref. SPA-01) 
Subject to change

Drawn	Drawn date
JH	APR 27-2010
Checked	Checked date
-	-
Scale	Rev.
1:1	1
DWG No	
ST504T-W	



stella

[t] (604) 231 5892
[f] (604) 231 5893
[e] info@stellaglasshardware.com

ASSEMBLY DRAWING
NON-ARTICULATING BOLT NB4 (P02) TIMBER MOUNTING
FORMERLY NB4-A09a