

DP5052TM6S21016


Adjustable Heavy-Duty Doc & Pin (Tapered Face) (Double Connection)

An Original Design features a doc with in and out 6mm [1/4"] adjustability accommodating uneven mounting surfaces with ease.

It's just so dang versatile –

It can be used in everything from structural glass walls to balustrades to vestibules and canopies.

All these features...and it's priced competitively with similar products without this product's adjustability.

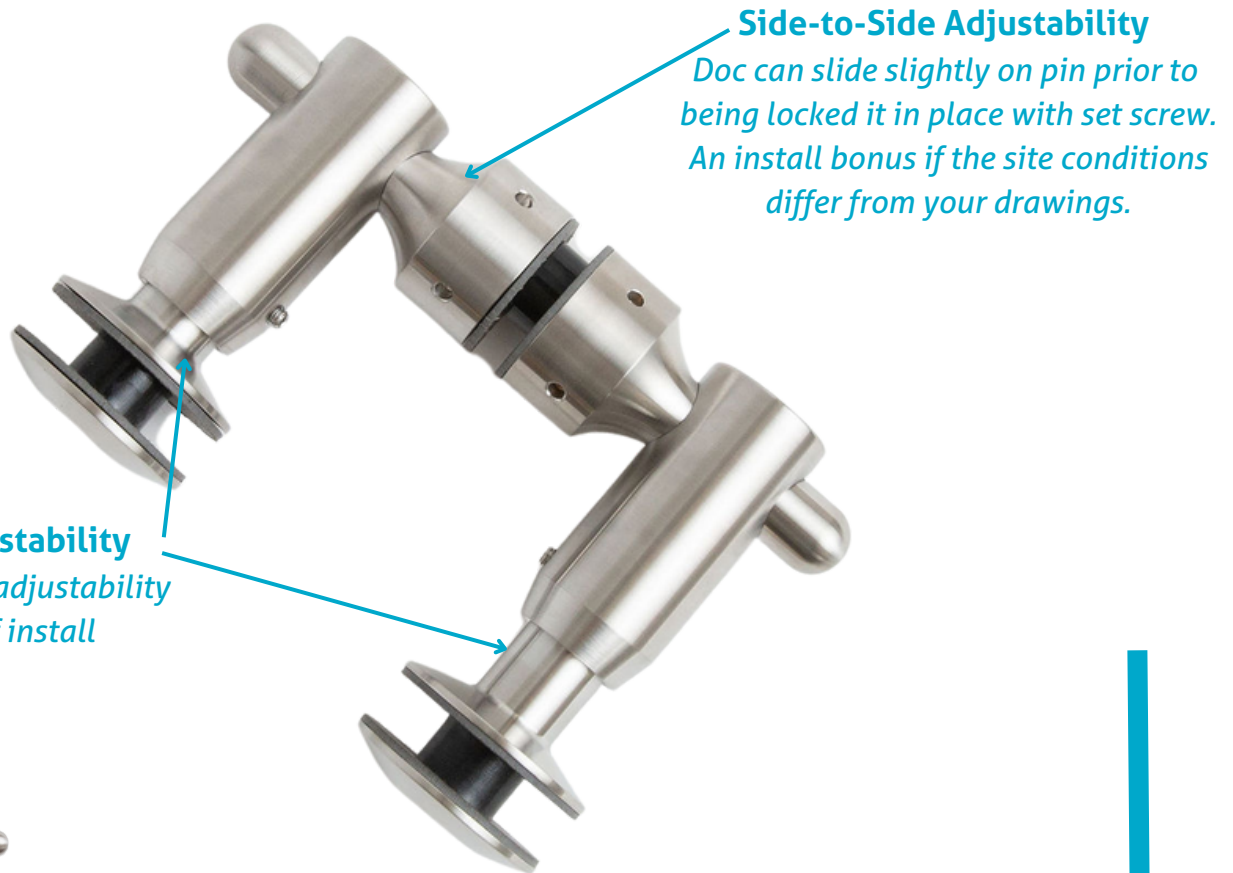

Supplying the Complete Assembly...with Flexible Mounting Options

Supplied with M12 Stud that can be cut to length (suitable for mount via wood and metal). Complete with gaskets and ferrule bushings for connection to glass, plus via glass. Set screws also included to lock in place.



Front View

PRODUCT DATA SHEET



DP5052TM6S21016

Specifications

Adjustable Heavy-Duty Doc & Pin (Tapered-Face) (Double Connection)

- Division:
 - Found in Divisions 05 & 08
- Materials:
 - Steel: Grade 316 stainless steel
 - Finish: No. 4, 320 grit
 - Gaskets: Material based on high-quality aramid fibers and special functional fillers bonded with NBR, sulfur-free, solvent-free
 - Ferrule Bushing: Acetal delrin
- Mount Type: Side mount
- Mounting Structure: Glass, concrete, steel or wood
 - Substrate thickness: 10mm to 16mm [3/8" to 5/8"]
- Loading Capability: 3.5kN (per leg)
- LEED Standards:
 - Stainless Steel (primary material) - >45% pre-/95% post- consumer recycled content by weight
- Compliances/Standard: Project specific
- Warranty: 2 year limited warranty* (can be project specific)

Key Details

Typical Applications	<ul style="list-style-type: none">• Double connector is used on the middle of applications• Guards/balustrades• Partitions/walls/canopies
Glass Thickness	<ul style="list-style-type: none">• 12mm to 21.5mm [1/2" to 7/8"]
Recommended Diameter Hole In Glass	<ul style="list-style-type: none">• Min - 22.2mm [7/8"]• Rec - 25.4mm [1"]• Max - 28.6mm [1 1/8"]
Key Measurements	<ul style="list-style-type: none">• Cap Face Diameter - 50mm [2"]• M12 stud (60mm) for pin/M8 x 1.25 Flat Head (35mm) for Doc
Key Distances	<ul style="list-style-type: none">• Centre of Pin to the underside of glass - 77mm [3"] +/- 6mm [1/4"]• Centre of Doc to mounting surface - 60mm [2 3/8"]
Tool Info	<ul style="list-style-type: none">• Specialized - Stella C-Spanner• General - Allen Key (5mm)

A Stella Standard Part "SKU 1187276" Exclusively Distributed via